

Mono-crystalline Solar Module (54Cells) All Black

CEC6-54MHV

400~415W


POWER OUTPUT RANGE

20.5%~21.3%

MODULE EFFICIENCY

PRODUCT CHARACTERISTICS

- ◆ Light weight, easy to install, high cost performance, high efficiency
- ◆ Module certified to withstand extreme wind (2400 Pascal) and snow loads (5400 Pascal)
- ◆ Guaranteed output: 0~+5W
- ◆ Excellent performance in weak light condition, such as cloudy, morning and sunset
- ◆ Independently certification by international certification authorities, include IEC61215, IEC61730, CE

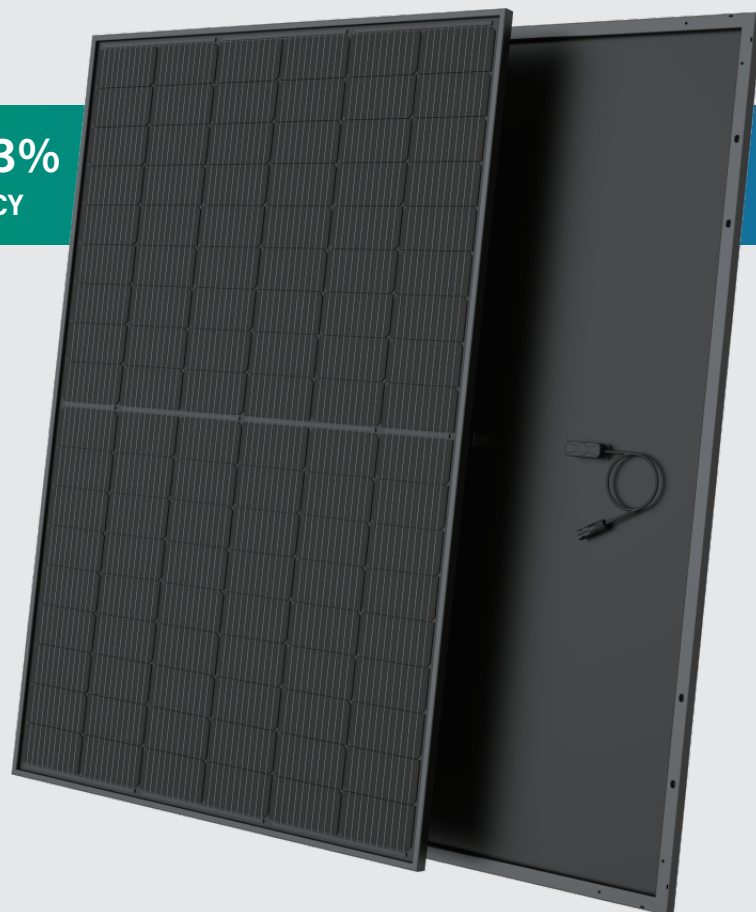

LINEAR WARRANTY AND CERTIFICATION



1st year Power output not less than 98%




Warranty for product materials and processes within 12 years



Power output not less than 91.95% within 12 years



Power output not less than 84.8% within 25 years

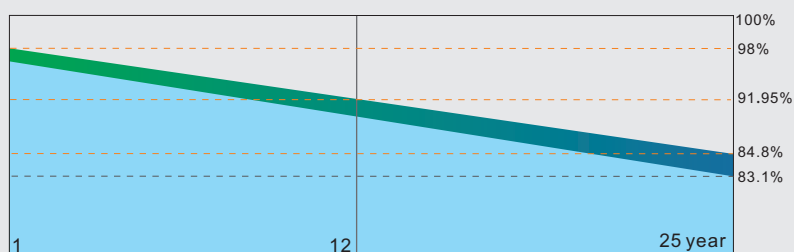


■ New linear power warranty


■ Standard module linear power warranty

QUALITY OF CENTRAL ENTERPRISE SERVICE GUARANTEE

Assembly Drawing

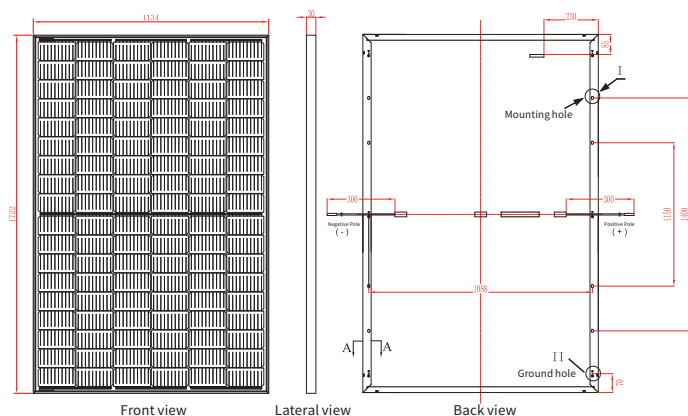

I-V Curve (400W)

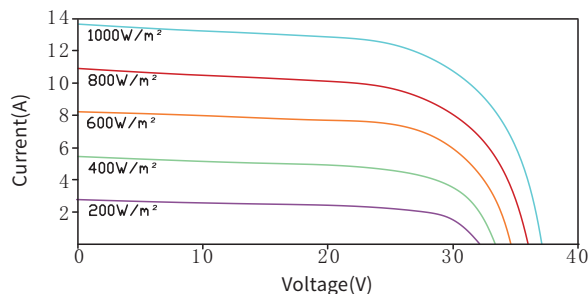

Limit Parameters

Operating temperature	-40°C to +85°C
Maximum fuse current rating	25A

Physical Parameter

Dimension	1722*1134*30mm
Mounting hole size	1150*1088, 1400*1088mm
Cable Length	300mm; Customizable
Weight	21.5Kg

Mechanical Characteristics

Cell type	182×91mm monocrystalline silicon solar cells, a group of 108 cells (6×18)
Glass	3.2 mm thick low-iron tempered glass with high light transmittance
Junction Box	IP Grade: IP68

Temperature Rating

Nominal Module Operating Temperature (NMOT)	42°C±2°C
Maximum Power (Pmax) Temperature Coefficient (δ (%/°C))	-0.34
Open-circuit voltage (Voc) Temperature coefficient (β (%/°C))	-0.26
Short circuit current (Isc) Temperature coefficient (α (%/°C))	0.05

Mode of Packing

40 Feet Container	Pieces per case	36 pcs/case
	Quantity per pallet	2 case/pallet
	Pieces per container	936 pcs/40'GP

Parameters of Module

Electrical parameters (Standard test condition)	CEC6-54-400MH CEC6-54-400MHV	CEC6-54-405MH CEC6-54-405MHV	CEC6-54-410MH CEC6-54-410MHV	CEC6-54-415MH CEC6-54-415MHV
Maximum power-Pmax(Wp)	400	405	410	415
Maximum operating voltage-Vmp(V)	31.09	31.26	31.42	31.61
Maximum operating current-Imp(A)	12.86	12.96	13.05	13.13
Open-circuit voltage -Voc(V)	37.00	37.20	37.40	37.60
Short-circuit current-Isc(A)	13.65	13.76	13.84	13.94
Maximum system voltage-Vdc(V)	1000/1500	1000/1500	1000/1500	1000/1500
Module efficiency(%)	20.5%	20.7%	21.00%	21.30%
Power tolerance(W)	0/+5W	0/+5W	0/+5W	0/+5W

Measured values under STC (temperature 25°C, air mass AM1.5, irradiance 1000W/m²)

Test under NMOT conditions

Max Power(Wp)	298.9	302.7	306.4	310.1
Max-Power Voltage Vmp(V)	28.98	29.13	29.29	29.45
Max-Power Current Imp(A)	10.32	10.39	10.46	10.53
Open-Circuit Voltage Voc(V)	34.97	35.15	35.34	35.53
Short-Circuit Current Isc(A)	11.07	11.17	11.26	11.35